

Felcor - DoubleTree Orlando

Site Location: Orlando, FL
 System Size: 400 tons
 Facility Type: Hotel



System Savings: \$30,677.35

Installation Date: 29-Nov-06



Operational Costs per year:	Pre-installation of system	Post-installation of system	Percentage Improvement	Financial Improvement
Energy	\$136,651.17	\$116,153.50	15.0%	\$20,498
Water	\$22,239.36	\$16,659.68	25.1%	\$5,580
Chemicals*	\$4,600.00	\$0.00	100.0%	\$4,600
Totals:	\$163,490.53	\$132,813.18	18.8%	\$30,677

* Minerals and other water treatment costs included in service package

System Payback:

Net Purchase Price	\$38,000.00
Annual Savings	\$30,677.35
Years to Payback	1.2 years

Water Savings

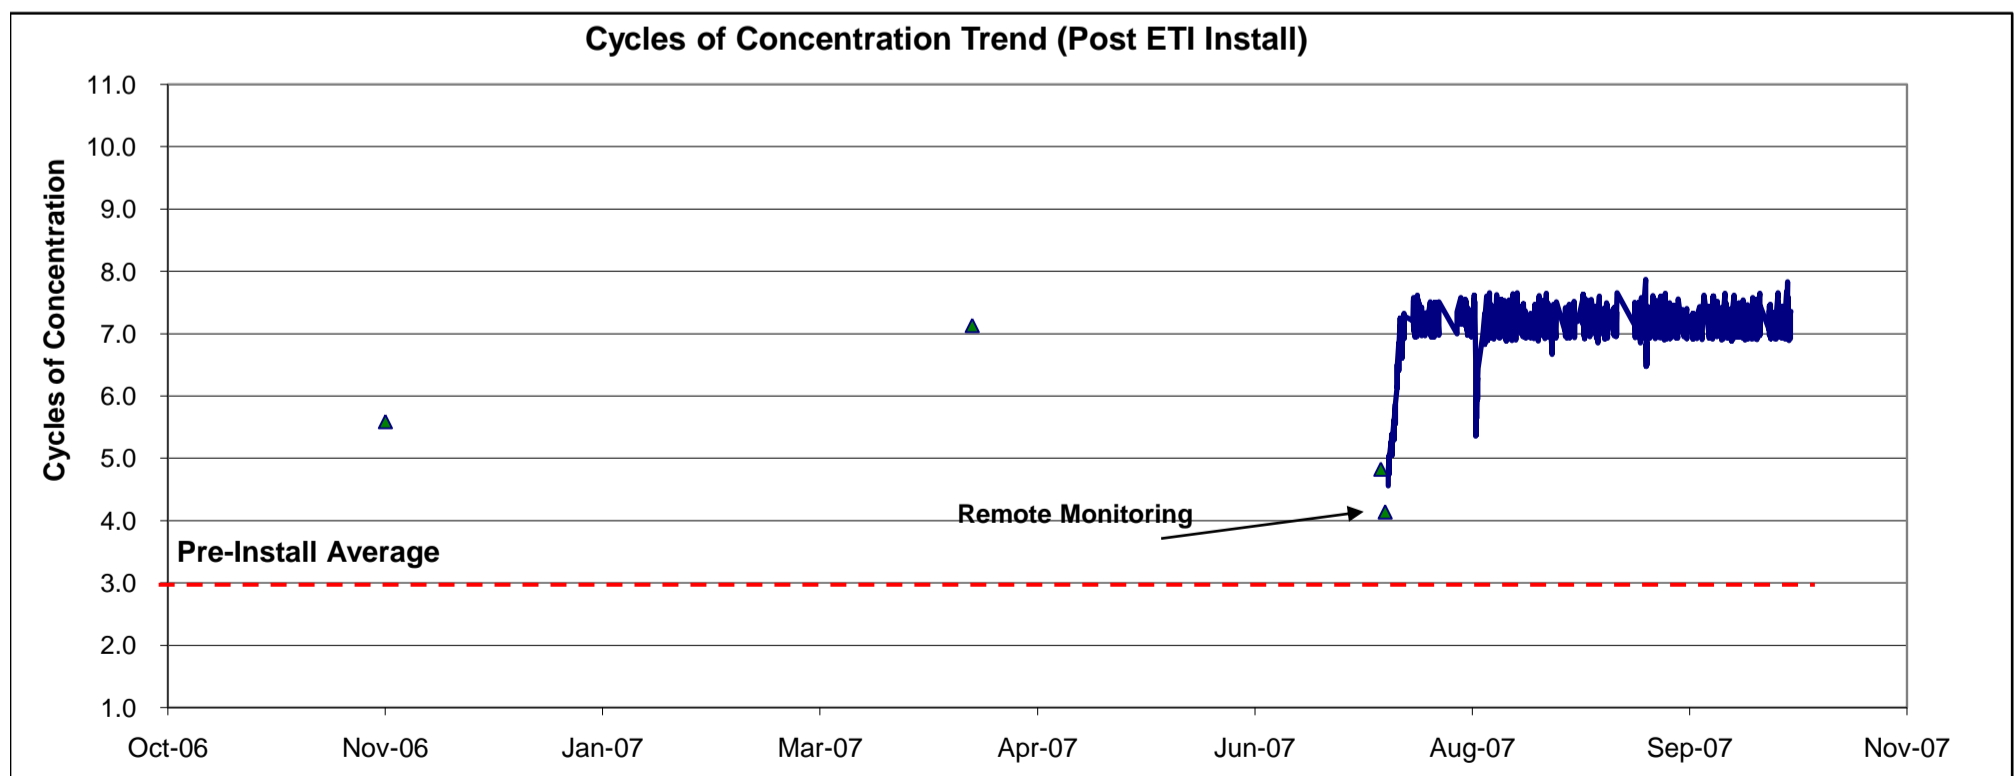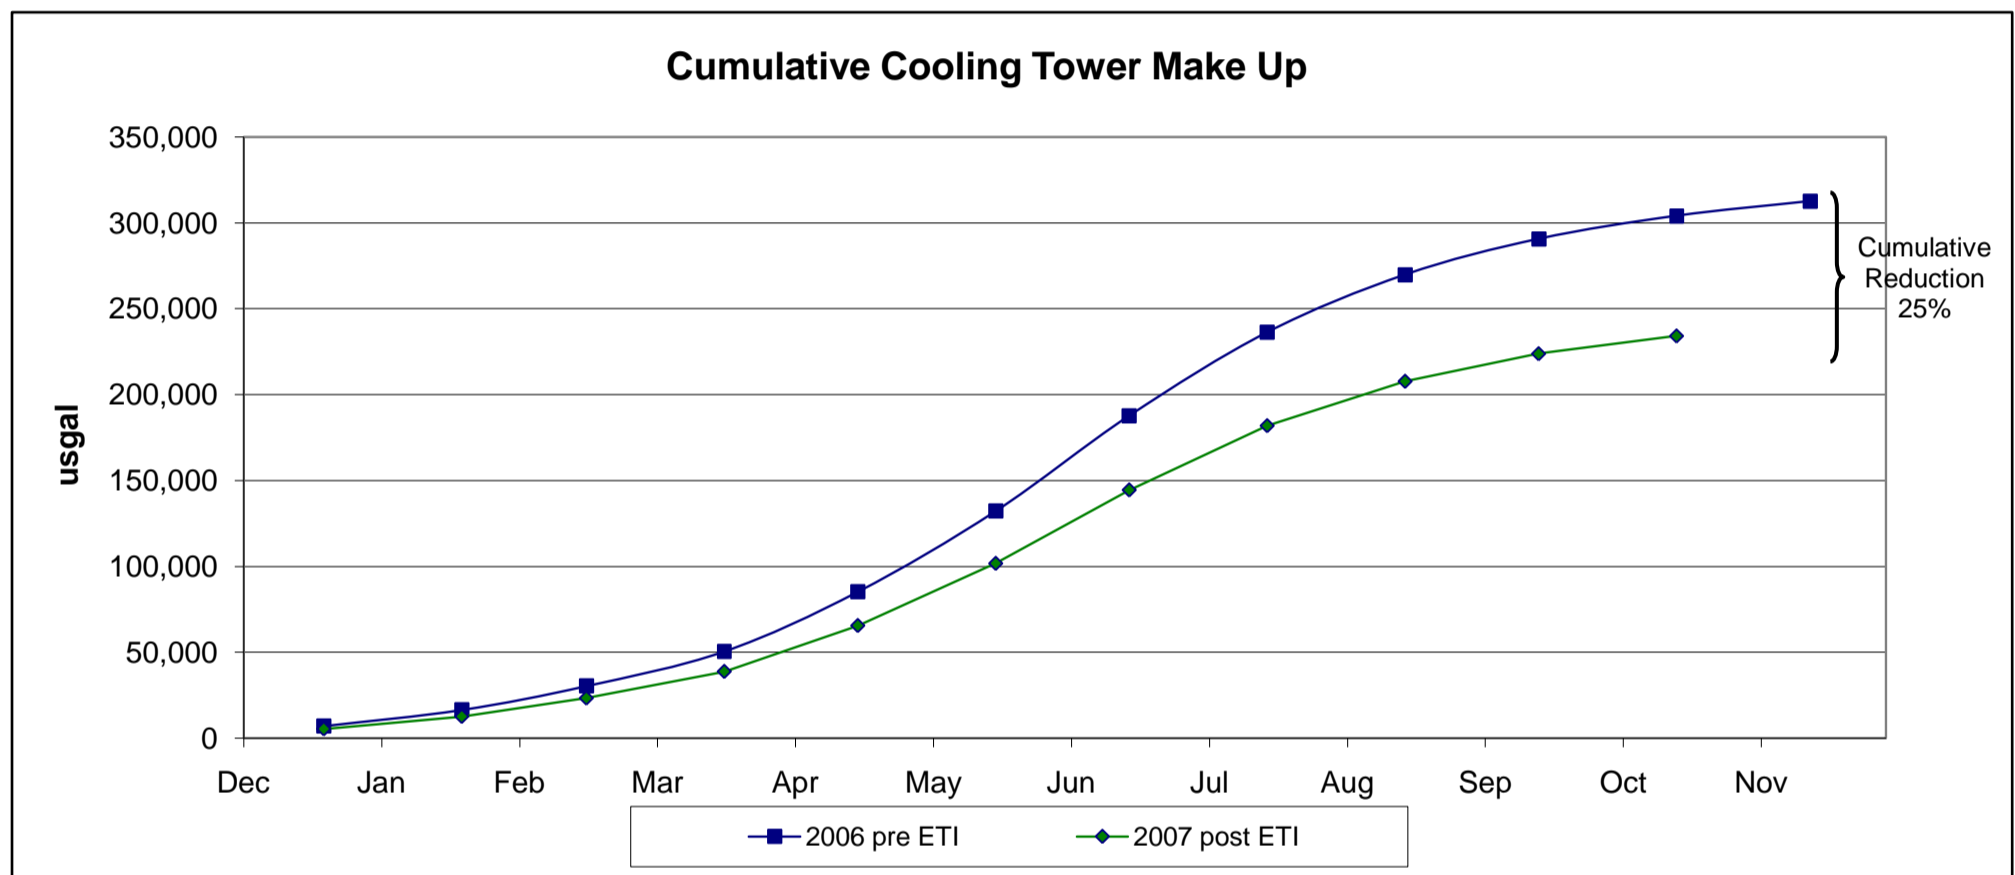


Felcor - DoubleTree Orlando

Site Location: Orlando, FL
 System Size: 400 tons
 Facility Type: Hotel




Corrosion Control

Copper

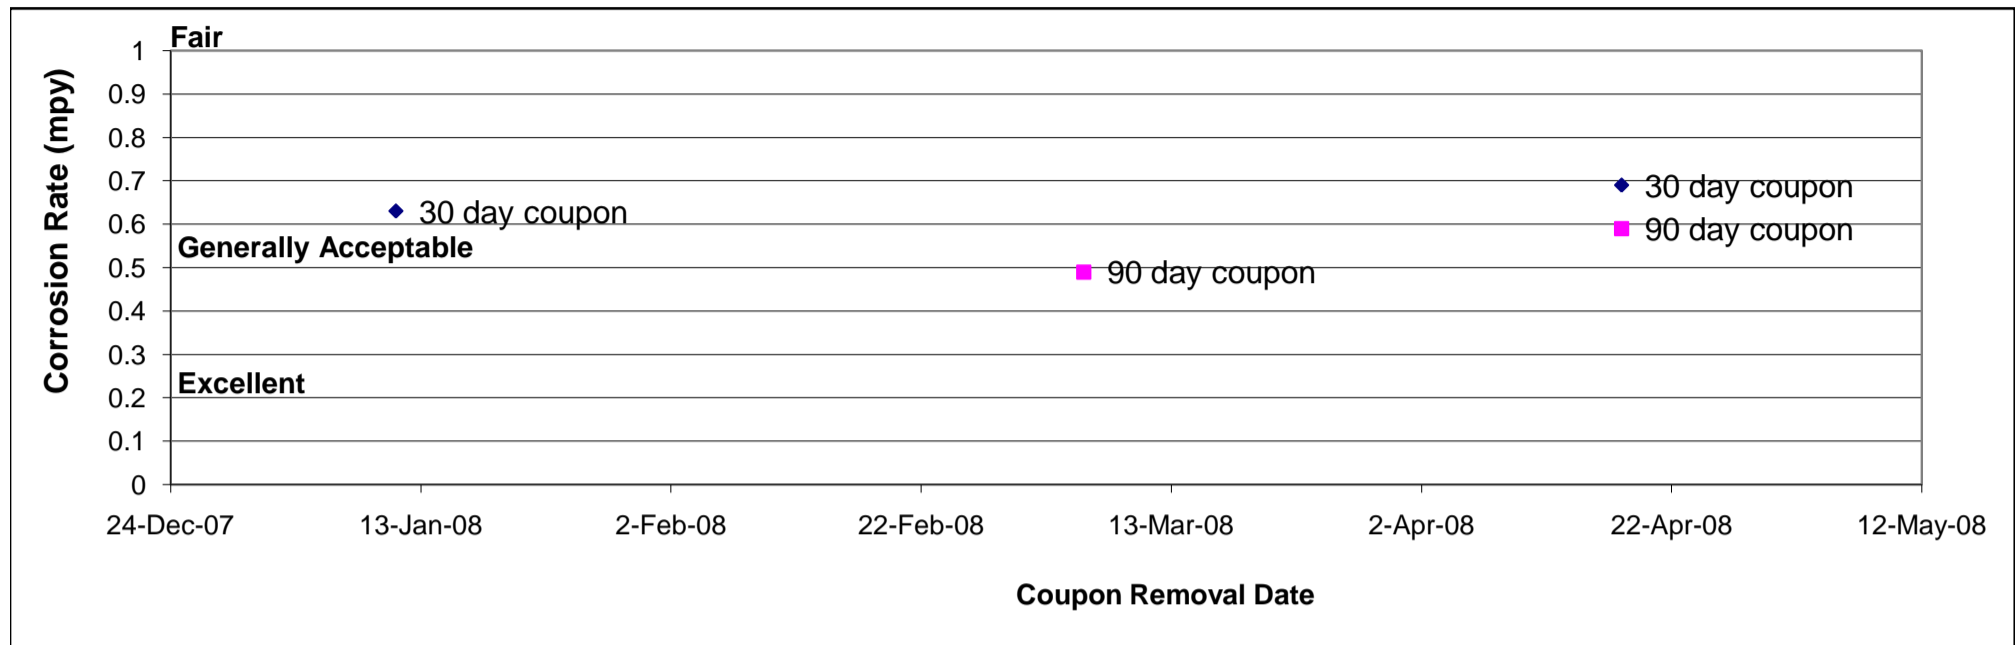

Date Removed	Test Period	Corrosion Rate (mpy)	NACE Rating
11-Jan-08	30	0.63	Fair
6-Mar-08	85	0.49	Generally Acceptable
18-Apr-08	43	0.69	Fair
18-Apr-08	95	0.59	Fair

Mild Steel

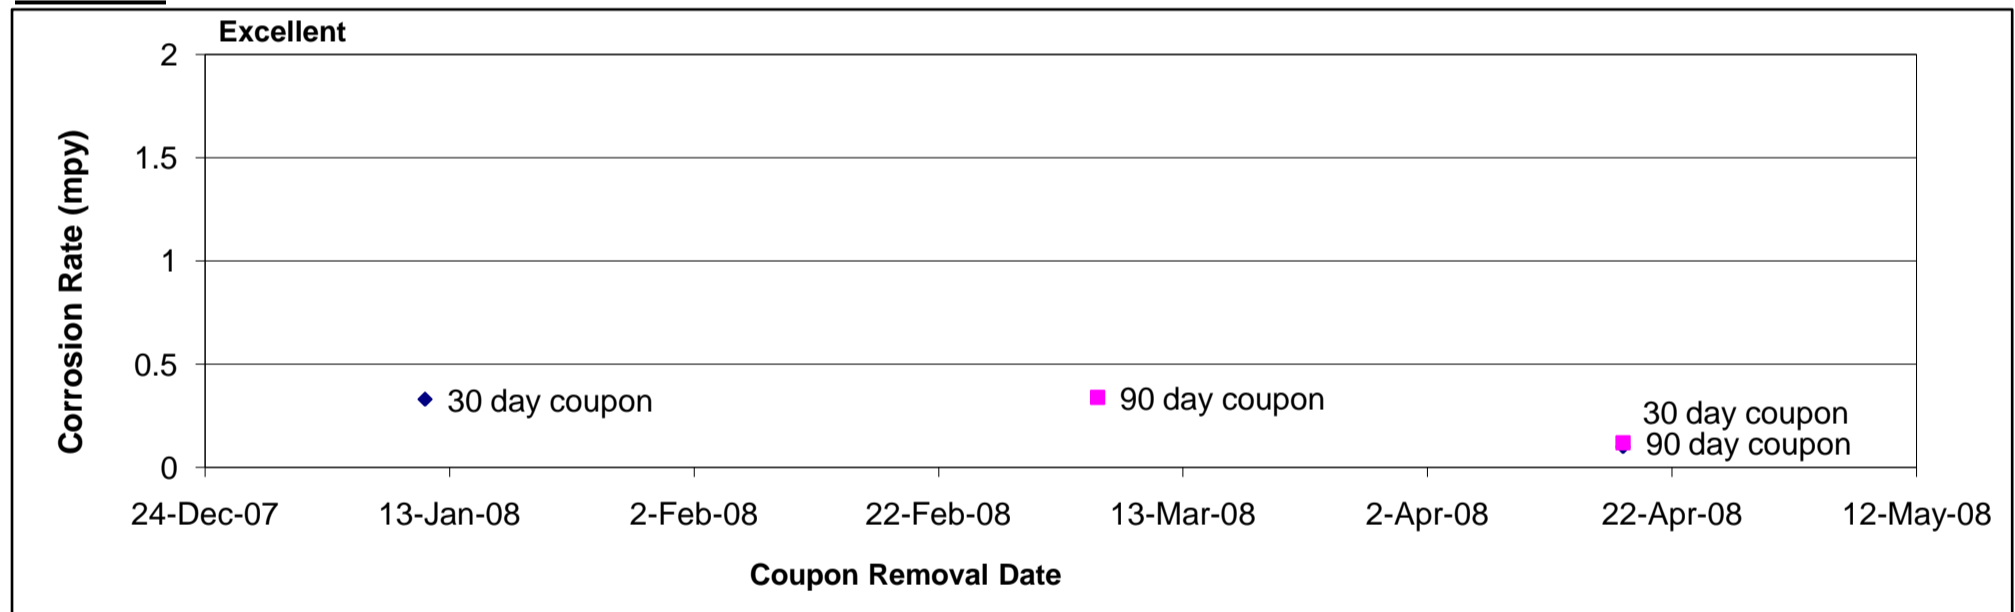

Date Removed	Test Period	Corrosion Rate (mpy)	NACE Rating
11-Jan-08	30	0.33	Excellent
6-Mar-08	85	0.34	Excellent
18-Apr-08	43	0.1	Excellent
18-Apr-08	95	0.12	Excellent

Biological Control

